


Control / Regulation

The energy consumption of a screw spindle pump is primarily influenced by the efficiency of the pump, the efficiency of the motor and the sizing of the pump with respect to the working point of the system.

Within the scope of our seminars we offer our support for:

- pump selections
- supply you with detailed information on the use of variable frequency drives
- show potential energy savings through pump controls
- support you locally in retrofitting existing applications and systems

For detailed information please do not hesitate to contact us.

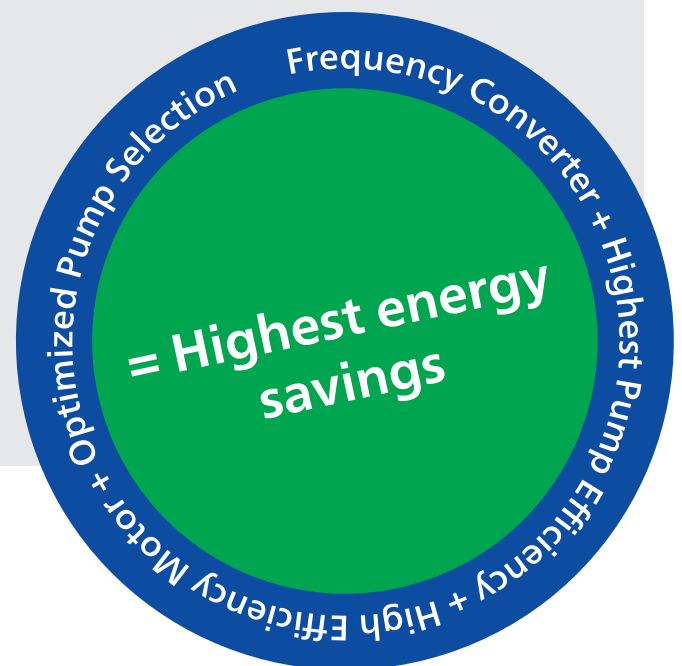

Regulation

Regulation is an operation with which a physical value such as pressure is continuously sensed and compared with a set value. In the event of deviation the regulation device (here a PI controller) provides for the desired adaptation.

With regulation a check is made whether a desired state is achieved or not. This allows for a process to reach a predetermined operating pressure while adjusting the flow of the pump to the required flow of the consumer.

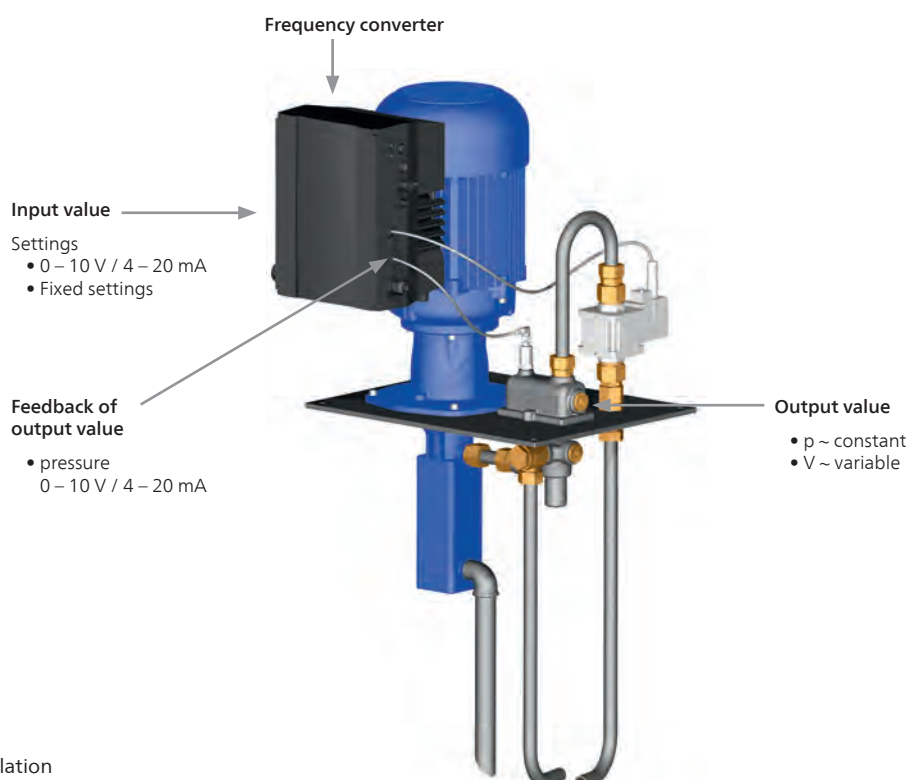


Fig. 1: Scheme of regulation

Variable Speed Control of High Pressure Pumps

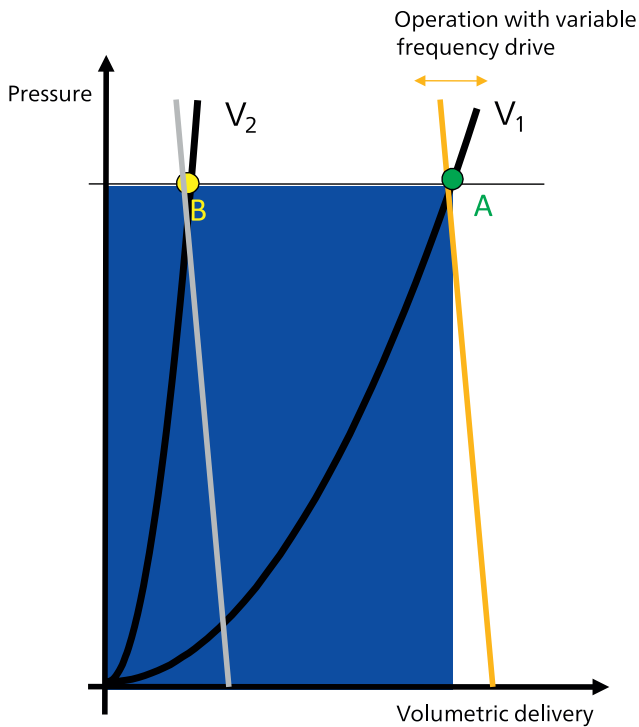


Fig. 2: Potential energy savings of a screw pump with variable frequency drive and two consumers.

Working point	Pressure relief valve	Variable frequency drive	Note
A	closed	no	Design point
B	open	no	Energy loss and flow through the pressure relief valve
B	closed	yes	Energy savings up to 80 % (e.g. pressure regulation)

Pump curve array of a screw pump that is controlled with a VFD


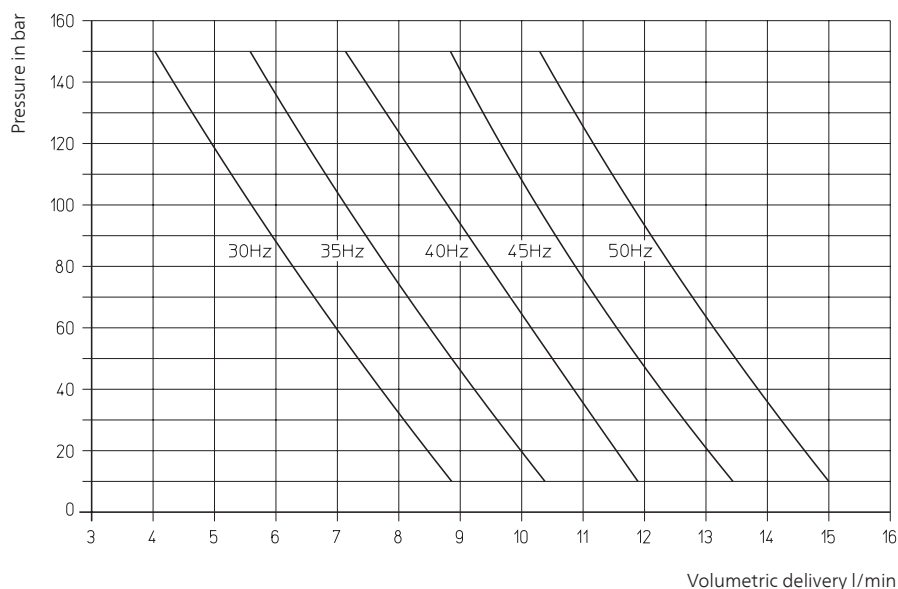



Fig. 3: Example of a BFS130/150 in oil 20 mm²/s

Brinkmann Pumps Offset Regulation for High Pressure Pumps

The target pressure is calculated by the VFD based on the working point and is not supplied by the machine tool. The intelligent control of the valves allows for minimizing potential pressure spikes.

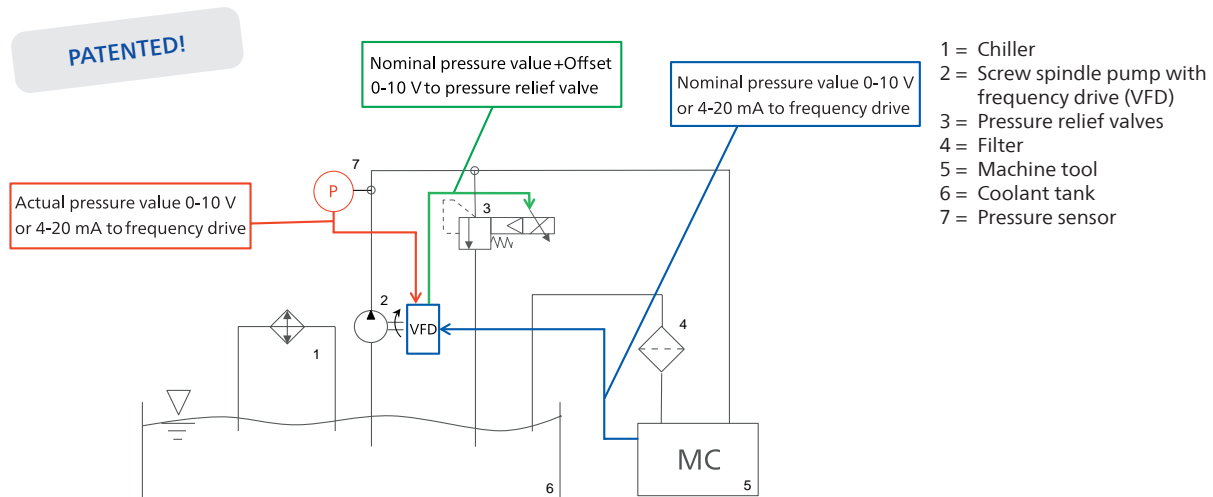


Minimizing of pressure peaks during tool change

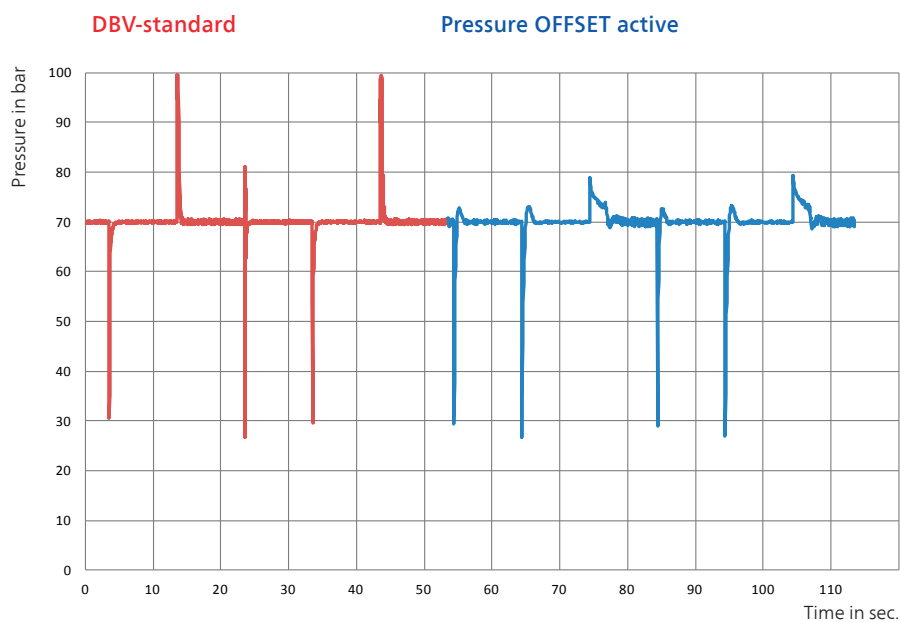

TECHNICAL DATA Frequency converter FKO (1.5 – 22 kW)

Function	Specification
Rated voltage	3 AC 380 V -10 % ... 480 V +10 %
Rated frequency	50/60 Hz ± 6 %
Output ranges	... 1.5 kW 2.2 – 4 kW 5.5 – 7.5 kW 11 – 22 kW
Housing size	A B C D
Protective system	IP 65 IP 55
EMV approvals acc. to EN61800-3US	C2
Temperature range	-10 °C ... +50 °C
Overload capability	1.5 times rated output current
Protective functions	undervoltage, overvoltage, I ² t-restriction, short circuit, motor temperature, converter temperature, anti-tilt protection
Output frequency range	according to layout at factory
Digital inputs	4
Fixed frequencies	7
Digital outputs	2
Analog inputs	2 analog inputs (0/2 – 10 V, 0/4 – 20 mA)
Analog outputs	0 – 10 V (-I _{max} = 10 mA) or 0 – 20 mA (burden R = 500 Ω)
Process control	PID
Relay outputs	2 x NO contacts 250 V AC 2 A
USB interface	USB on plug M12 (RS485/RS232)
Manual control unit (optional)	MMI with cable
Bus modules (optional)	PROFIBUS DP, CANopen, EtherCAT, PROFINET
UL approval	yes

Dimensions with Brinkmann motor

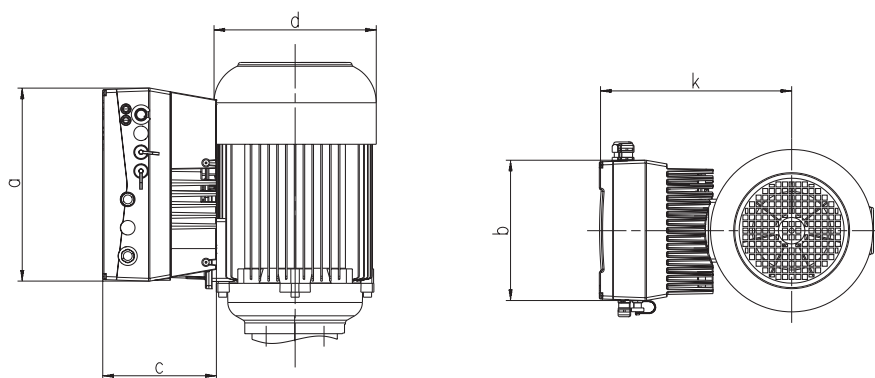

Motor power kW	housing size	a mm	b mm	c mm	d mm	k mm
1.1	A	233	153	120	138	199
1.3 – 1.7	A	233	153	120	176	209
1.9 – 2.6	B	270	189	140	176	223
3.0 – 4.0	B	270	189	140	218	243
5.0 – 5.5	C	307	223	181	218	287
6.0 – 9.0	C	307	223	181	258	306
11.0 – 13.0	D	414	294	233	314	404